

Rêve® Comfort Height®

One-piece compact elongated chair-height toilet w/seat K-3797

Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design.
- Compact elongated bowl offers added comfort while occupying the same space as a round-front bowl.
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults.
- Dual flush offers a choice of 0.8 or 1.6 gpf (3.0 or 6.0 lpf).
- 2-1/8" (54 mm) glazed trapway.
- Skirted trapway simplifies cleaning.
- Quiet-Close™ elongated seat closes quietly.
- Coordinates with other products in the Rêve collection.

Installation

- Standard 12" (305 mm) rough-in.
- Supply line sold separately.

Water Conservation & Rebates

Eligible for consumer rebates in some municipalities.

Recommended Products/Accessories

K-9384 Dual-flush Actuator 1023457 Wax Ring/Hardware Kit 1265114 Connector Hose K-23726 Drain treatment

Included Components

Additional Components:

Dual flush push buttons Installation kit Installation template Tank accessory pack Tank cover Toilet seat





Codes/Standards

ASME A112.19.2/CSA B45.1 ASME A112.19.14 DOE - Energy Policy Act 1992 EPA WaterSense®

KOHLER® Toilets and Seats Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description






KOHLER®

Rêve® Comfort Height®

One-piece compact elongated chair-height toilet w/seat K-3797

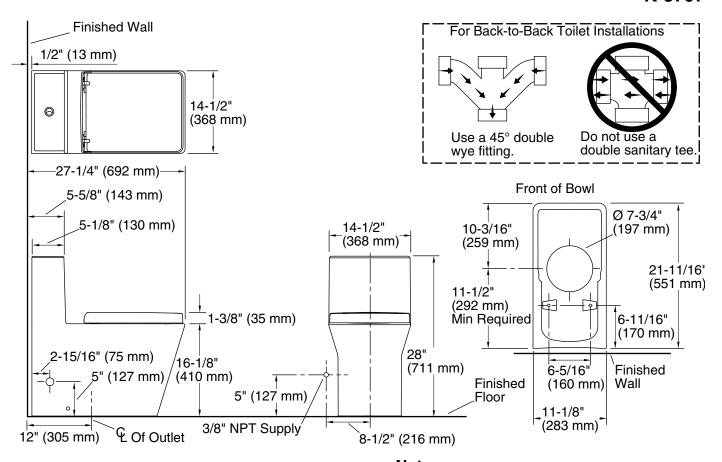

Technical Information

All product dimensions are nominal.

Toilet type: One-piece, Floor-mount

Waste Outlet: Floor
Bowl shape: Elongated
Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.6 gpf (6 lpf)
Reduced: 0.8 gpf (3 lpf)

Water surface size: 4-1/8" x 5-1/2" (105 mm x 140 mm)

Rim to water 9-3/4" (248 mm)

surface:

Rough-in: 12" (305 mm) Seat-mounting 7-7/8" (200 mm)

holes:

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

